

The FX+ furler, fitted with the Fast thimble, allows to furl in the asymmetric Spinnakers from the cockpit by pulling the bottom furling line. The anti-twist rope rotates up to the top and then transmits the rotation from the head to the tack of sail. With this simple system it is possible to use your existing asymmetric Spinnaker.

**FAST ASYMMETRIC SPINNAKER THIMBLE**
**FX+ with FAST thimble Features :**

- FAST thimble : with the FX+ furler, this FAST system allows you to use your FX+ from Gennaker to asymmetric Spinnaker in a two clicks
- Easy and regular furling from top to bottom (see pictures below). Free luff on asymmetric Spinnaker
- Same FX+ features : tested mechanisms, strong and clever
- Maintenance free : high protection of the mechanisms

**FX+ swivel with anti-impact cover (in neoprene)**  
(see page 30)

**From Gennaker or Code Zero to the asymmetric Spinnaker**


**Anti-twist rope**  
(supplied on request)

**Simple mechanisms FX+**

**Quick release in**

**Safe tack attachment**

Stainless steel. Resistant and smooth edge for a secure latching




**Carbon housing**  
strong and light

**FAST : Gennaker / asymmetrical Spinnaker thimble**

Rotating tack fitting with Torlon® balls  
(Tack attaching rope included)


**FAST thimble, perfectly designed to fit the FX+ drum jaws with quick release pin**

Removable furling line

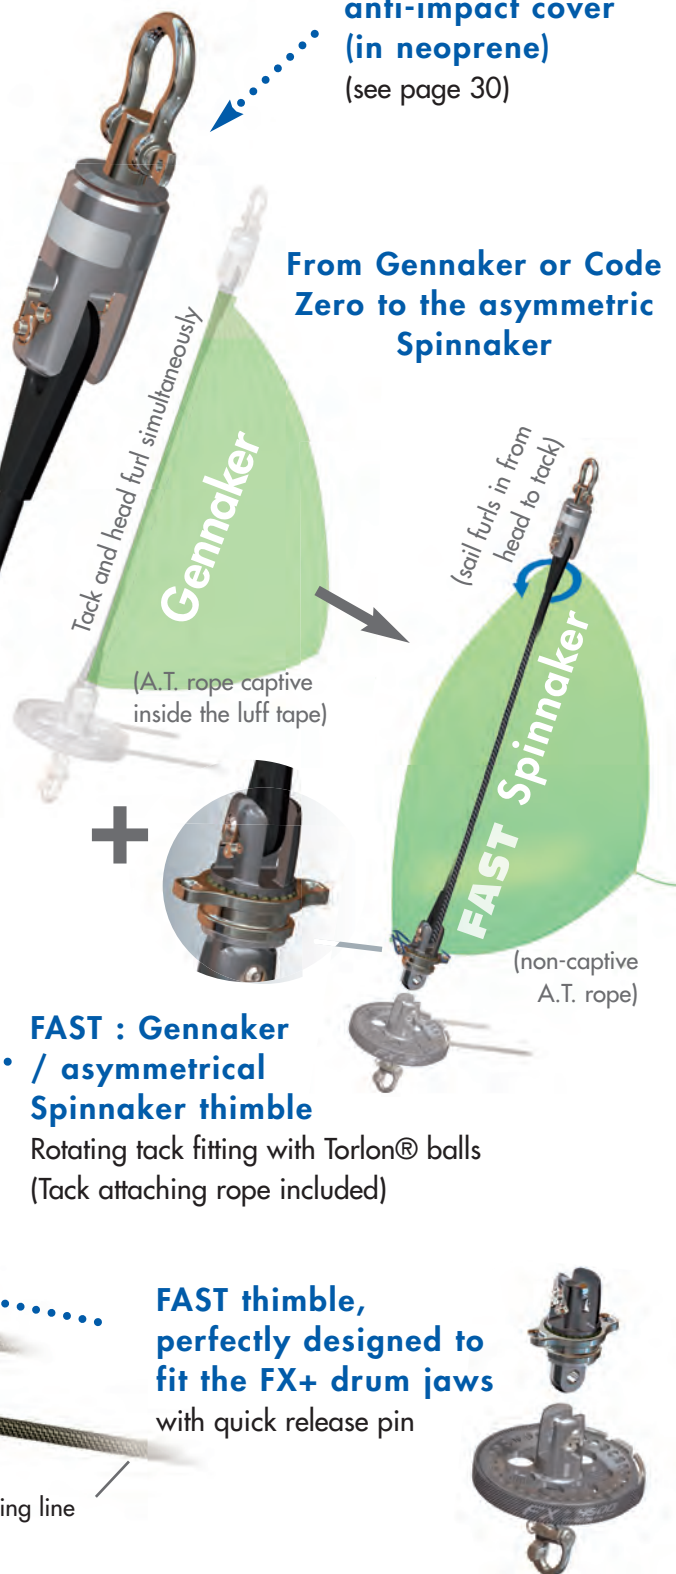



## "top-down" System

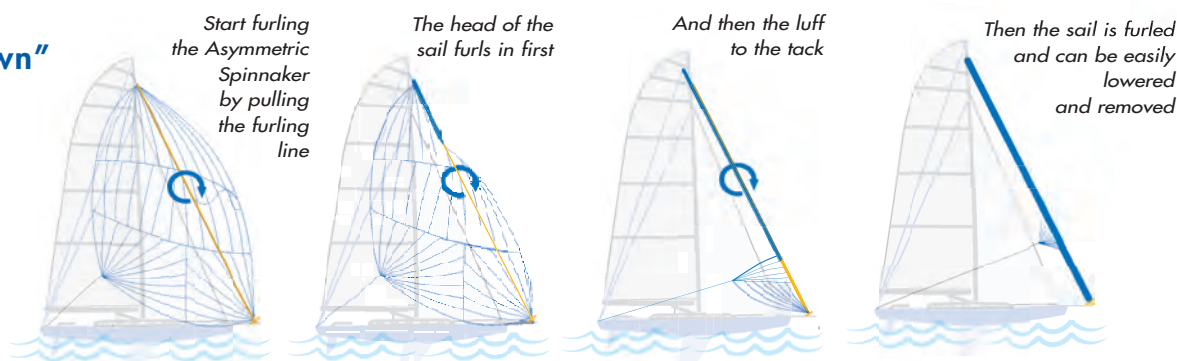

### FX+ Furler



### FAST thimble



## FX+ FAST : FURLER MODELS

| Model                                              | FX+ FAST<br>2500  | FX+ FAST<br>4500   | FX+ FAST<br>7000   | FX+ FAST<br>12000 |
|----------------------------------------------------|-------------------|--------------------|--------------------|-------------------|
| Boat length<br>(meters)                            | 11,5<br>↓<br>14 m | 13<br>↓<br>16 m    | 16<br>↓<br>20 m    | Contact<br>us     |
| Max asymmetric Spinnaker<br>area (m <sup>2</sup> ) | 90 m <sup>2</sup> | 170 m <sup>2</sup> | 270 m <sup>2</sup> |                   |

## FX+ FAST: Option fitting for asymmetric Spinnaker (System suitable for use with an existing FX furler)



### Fast thimbles for FX+ furlers

| Fast Model | FX+/FXT<br>Model | max rope<br>(mm) | Height<br>(mm) | Weight<br>(g) | Reference   |
|------------|------------------|------------------|----------------|---------------|-------------|
| FAST 2500  | FX+ 2500         | 16               | 82             | 426           | 43230002540 |
| FAST 4500  | FX+ 4500         | 20               | 92             | 581           | 43230004540 |
| FAST 7000  | FX+ 7000         | 22               | 119            | 1114          | 43230007040 |
| FAST 12000 | Contact us       |                  |                |               |             |
| Custom     |                  |                  |                |               |             |



### Adjusting the tack :

To sail closer to the wind even better, it is necessary to lower the tack of the sail, this will push forward the belly. Inversely, lift up the tack and the belly of the sail will go aft, you will be able to sail further downwind.

### SSH : stainless steel solid sheaves

- Compact.
- Fitted with quick release pin.
- This option is available from FX+1500 up to FX+7000, above models on request (2-to-1 or 3-to-1 fitting).

### Solid sheave use :

- The solid sheave is used for tack height adjustment (see against).

## SSH : TACK ADJUSTMENT

